

6' Contoured Bench with Arms - Inground

Model Number:

BCA06-A-43-000

BCA06-B-43-000

BCA06-C-43-000

BCA06-D-43-000


BCA06-E-43-000

BCA06-F-43-000



Parts, Hardware, and Suggested Tools

| Unit Common Description | Units Per Model |
|--|-----------------|
| 6' Contoured Bench Seat with Arms | 1 |
| Contoured Bench Frame- Inground | 2 |
| 5/16-18 x 1 1/2" tap bolt w/black xylan | 8 |
| 5/16-18 nylock nut w/black xylan | 8 |
| 5/16 uss flat washer w/black ox | 16 |
| #vc300-8 5/16" bolt size 1/2" lg vinyl cap | 8 |

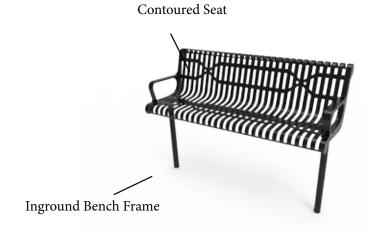

Bolt (HW01)

Mut (HW02)

Washer (HW03)

Bolt Cap (HW04)

Suggested Tools



Open Face Wrench



Socket Wrench



Tape Measure



Level

Specification - Written

Seat Material: Outer frame is made from 3/4" x 2" rolled form angle iron.

- Expanded Metal models Inside material is 3/4" #9 Expanded Metal, Bracing is 1-1/2" Solid Steel flat bar. All MIG welded.
- Punched Steel models- Inside material is 12 gauge, 1/2" punched Steel. Bracing is 1-1/2" Solid Steel flat bar. All MIG welded.
- Slatted Steel Inside Material is 11 gauge slatted steel. Bracing is 1-1/2" Solid Steel flat bar. All MIG welded.

Seat Coating:

- Advantage Coating MyTCoat's Advantage Coating is our proprietary coating unique only to MyTCoat. This state-of-the art coating will not chip, crack or peel. It doesn't have any drips or runs, and it the most durable coating on the market. The Advantage coating come with a 7 year Warranty and is available in 13 Different Colors.
- Industry Standard Coating the Industry Standard line is coated with a Premium Polyethylene Coating, The Industry Standard coating comes with a 5 year warranty and is available in 9 different colors


Frames: Frames are made from 2-3/8" OD pre-galvanized steel tubing.

Frame Coating: High Durability Architectural Grade electrostatic applied Powder Coat.

Hardware: Xylan Coated

Dimension: 6' Inground Contoured Bench with Back Overall Dimension: 72" L, Seat Height 18" (after install), Overall Height 51.5",

Specification - Drawing

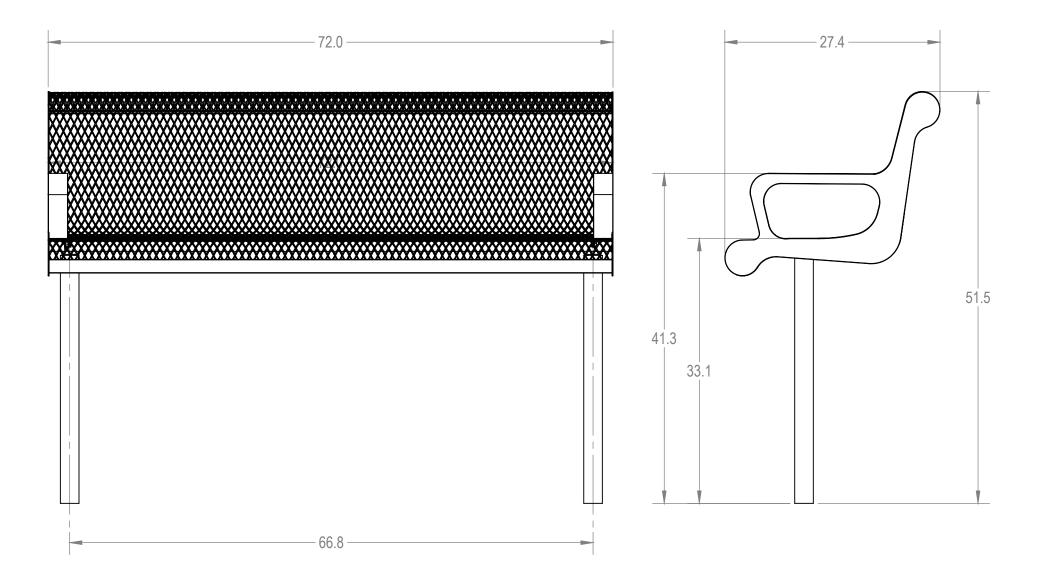

Assembly Instructions

- 1. Attach Inground Legs to Seat using hardware provided.
- 2. Set Bench in Concrete (recommend 12" x 12" x 24" Hole)
- 3. Seat should be 18" Height.

MyTCoat does not offer installation: Recommend a professional Installer to install bench inground

Installation Safety:

Please Follow Installation Instructions provided by Manufacturer

It is recommended that Product is installer by an experienced installer

Product should be inspected at the time of Delivery, do not install and damaged on defective parts or products.

All Hardware for proper assembly (not installation) is provided. Use hardware that is included with this product.

Product Maintenance:

Maintence inspection should be performed at a minium of once a year.

Cleaning, when neccessary can be performed with warm water and most house hold cleaners, aviod any harsh chemicals such as paint remover and acetone. Contact Manufacture before cleaning to dertermine if cleaning product is OK for use.

Any surface rust that may occur should be removed and repainted. Contact Manufacture for touch up paint or any other recommeded paints.

Contact Manufacture for instructions on removing vandalism such as spray paint.

In the case that the MyTCoat coating is damaged, contact Manufacture for instructions for repair.

Bolts and nuts should be check on a regular basis to maintain proper tightness.