

CONTEMPORARY DRINKING FOUNTAINS

GR Series

MODEL GRD65-BP6
BARRIER FREE BI-LEVEL
WALL MOUNTED DRINKING FOUNTAIN

STANDARD FEATURES

- Both Child or Adult ADA Compliant (when properly installed)
- Resistant to sunlight, heat, moisture and wear
- 18 gage, 304 stainless steel bowl
- 12 gage, heavy duty stainless steel arm, corrosion and scratch resistant finish
- Polished stainless steel, anti-rotation non-squirt bubbler
- 100 mesh inlet strainer
- P-trap, 1-1/4" O.D.
- Vandal resistant bottom stainless steel plate and screws
- 12 gage stainless steel Back panel

SUGGESTED SPECIFICATIONS

Model GRD65-BP6 is a wall mounted, vandal resistant bi-level round drinking fountain made from 18 gage, 304 stainless steel bowls mounted into green powder coated 12 gage, heavy duty stainless steel support arms with a steel powder coated back panel. Unit shall be activated by front mounted self-closing buttons, by using less than 5 pounds of force, which activates internally mounted valves with adjustable stream regulators controlling the water flow. Bubblers shall be polished stainless steel with non-squirt features and operate on water pressure range of 20-105 psig. Fountain is certified to ANSI A117.1, Public Law 111-380 (NO-LEAD), CHSC 116875 and NSF/ANSI 61, Section 9. Fixture meets ADA, ADA Standing Person, and ADA Child requirements when mounted appropriately.



MODEL:

(Must Specify)

☐ GRD64-BP6 Satin stainless finish

☐ GRD65-BP6 Green powder-coated (Shown)

☐ GRD66-BP6 Red powder-coated☐ GRD67-BP6 Blue powder-coated

Custom color finishes available upon request

OPTIONS

(additional costs may be incurred)

☐ - FRA4 Freeze resistant valve system

☐ - RBL Reverse bi-level

ACCESSORIES

(additional costs may be incurred)

☐I - A0000000-MP2

Mounting Plate


















▲ WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



CONTEMPORARY DRINKING FOUNTAINS

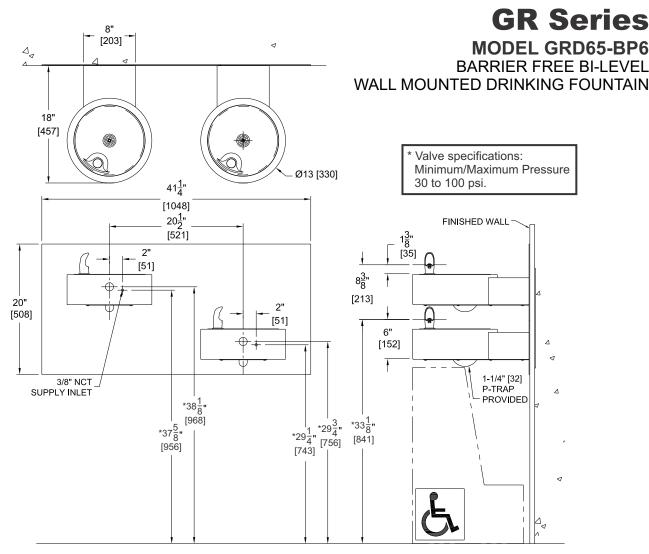

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. DIMENSIONS SHOWN ARE FOR RECOMMENDED ADULT HEIGHT. ADJUST VERTICAL DIMENSIONS AS NECESSARY TO COMPLY WITH FEDERAL, STATE, & LOCAL CODES.
- 3. STOP VALVE NOT PROVIDED.

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SUMMARY AL FOR TURING	Model Number & Options	_Quantity	All dimensions are subject to manufactures tolerance of plus or minus ½" nominal and subject to change without notice. Murdock
N SUI	Company		assumes no responsibility for use of void or superseded data. Dimensions
PRC	Contact	Title	may change with the addition of optional accessories. Murdock Mfg.™,
SELECTION SU & APPROVA MANUFACTU	Signature (Approval for		Member of Morris Group International™. Please visit www.murdockmfg.com for most
S	Manufacturing)	Date	current specifications.

MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA Phone 800-453-7465 • www.murdockmfg.com

Member of MORRIS GROUP