

Shower Series

MODEL M-PCS24 TWO STATION POOL AND BEACH SHOWER

STANDARD FEATURES

- Pushbuttons requiring less than 5 pounds for activation
- Adjustable Timing, from 5 to 60 seconds
- Chrome plated brass Showerheads with 1.6 GPM Flow Controls and adjustable spray pattern
- Vandal resistant fasteners
- Shut-off Valve for easy servicing
- Heavy duty, 14 gage, 304 stainless steel construction with corrosion and scratch resistant satin finish
- 1/4" Thick, Anchor Plate with O-ring x 3/4" NPT inlet connection provided

SUGGESTED SPECIFICATIONS

Column Shower shall be Murdock model M-PCS24, dual station Shower. Unit is to be pre-piped and hydrostatically tested.

Valves shall have internally mounted metering Valves, Pushbutton operated and requiring less than 5 pounds of force to activate. Timing shall be adjusted from 5 to 60 seconds.

Showerheads shall be chrome plated brass with 1.6 GPM Flow Restrictors and include an adjustable spray pattern from a coarse stream to a fine mist.

Unit shall be constructed of heavy duty 14 gage type 304 stainless steel polished to a satin finish with vandal resistant fasteners and shall include a 1/4" thick stainless steel Bottom Plate, providing secure mounting for Shower.

MODEL:

(Must Specify)

- ☐ M-PCS24 Satin Stainless Finish (Shown)
- ☐ M-PCS25 Green Powder-Coated
- ☐ M-PCS26 Red Powder-Coated
- ☐ M-PCS27 Blue Powder-Coated

Custom color finishes available upon request




Member of
U.S. Green
Building
Council



Recyclable
Product

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Please visit www.murdockmfg.com
for most current specifications.

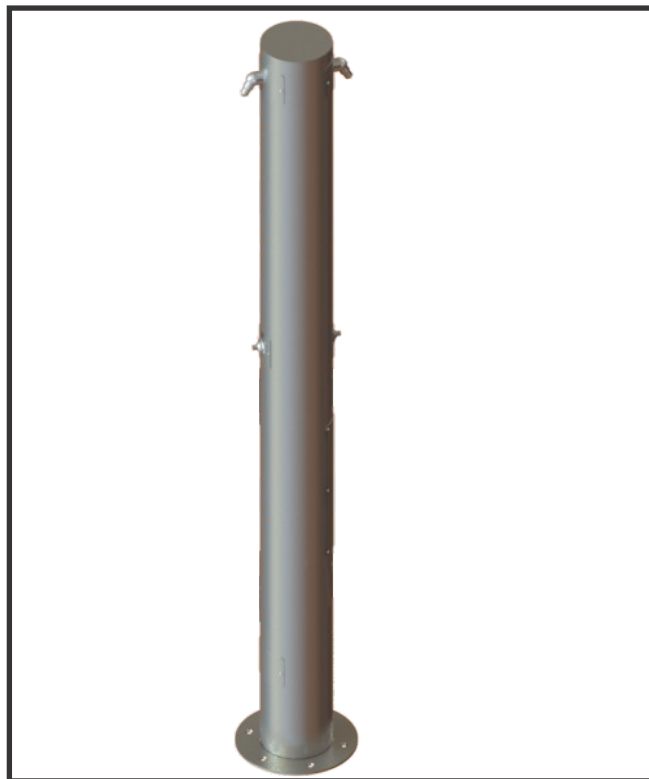

☐ Standard Model: M-PCS24

OPTIONS

(additional costs may be incurred)

- ☐ - FRU2 Underground freeze-resistant valve for two pushbuttons ^{1, 2}
- ☐ - FRU3 Underground freeze-resistant valve for three pushbuttons ^{1, 2}
- ☐ - FRU4 Underground freeze-resistant valve for four pushbuttons ^{1, 2}
- ☐ - FS Foot Shower at one station ¹
- ☐ - FS2 Foot Shower at two stations ¹
- ☐ - GB Grab bar - Two vertical grab bars and second lower shower head at 48" ¹
- ☐ - IAP In-ground anchor plate, in lieu of standard anchor plate ²
- ☐ - HB1 Hose Bibb, exposed compression with Hose outlet thread VB ¹
- ☐ - HB2 Hose Bibb, exposed Loose Key with Hose outlet thread VB ¹
- ☐ - HB3 Hose Bibb, Loose Key, Vandal Resistant with Hose outlet thread VB ¹
- ☐ - LOGO Customer specified logo ¹

Options Notes:

¹ See separate option sheet.

² IAP required for Freeze Resistant Valve options.

Complies with the
following standards:




MURDOCK MFG. • 15125 Proctor Avenue • City of Industry, CA 91746 USA
Phone 800-453-7465 or 626-333-2543 • Fax 626-855-4860 • www.murdockmfg.com

Member of
MORRIS GROUP
INTERNATIONAL

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock Mfg. assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.Murdockmfg.com for most current specifications.

Shower Series

MODEL M-PCS24 TWO STATION POOL AND BEACH SHOWER

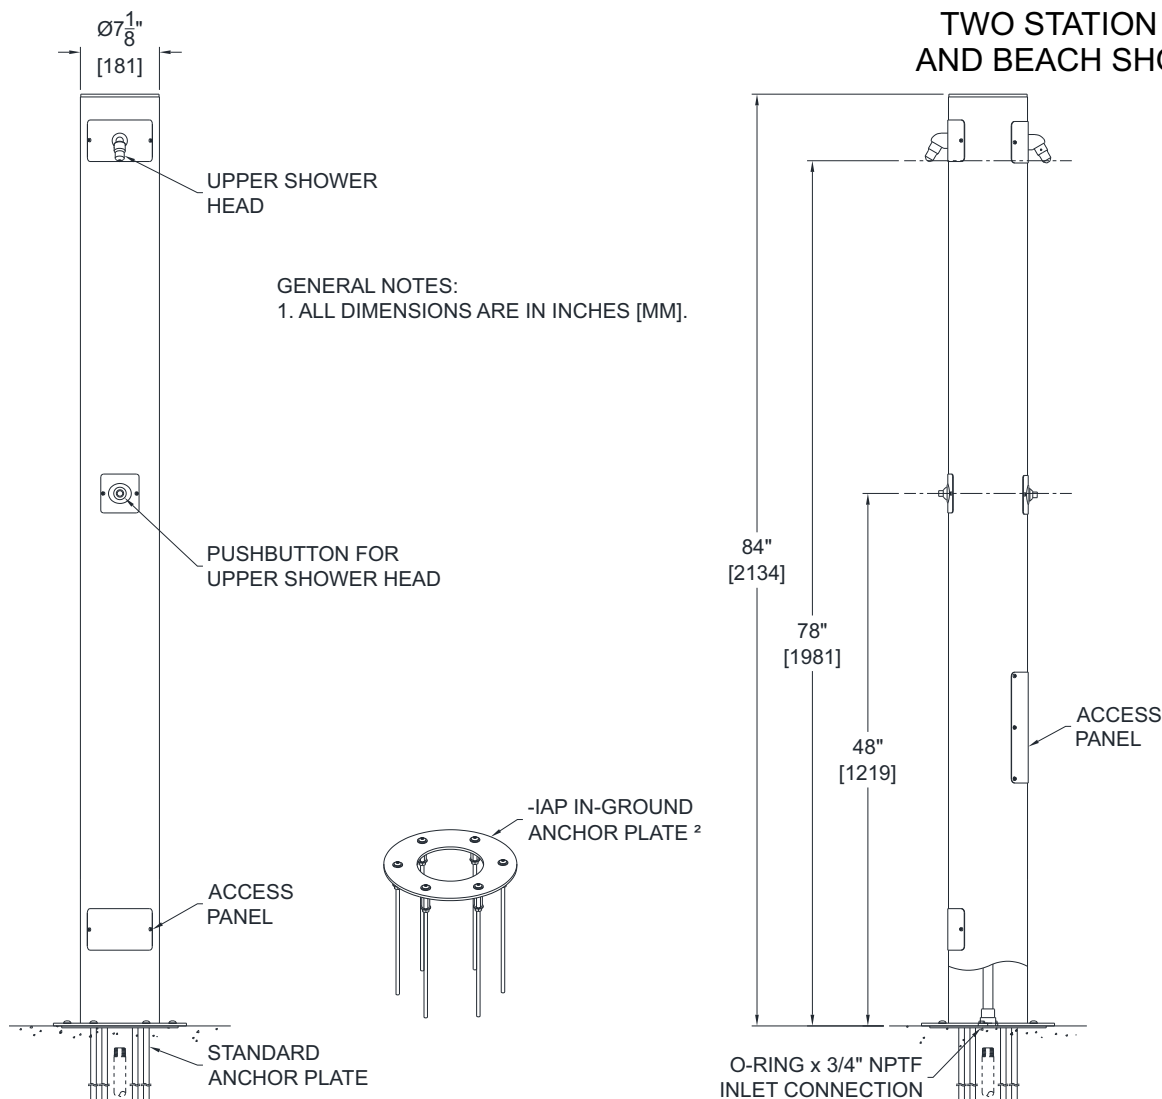

Murdock Mfg.™ warrants that its products are free from defects in material or workmanship under normal use and service for a period of one year from date of shipment. Murdock's liability under this warranty shall be discharged solely by replacement or repair of defective material, provided Murdock™ is notified in writing within one year from date of shipment, F.O.B. Industry, California.

SELECTION SUMMARY
& APPROVAL FOR
MANUFACTURING

Model Number & Options _____ Quantity _____

Company _____

Contact _____ Title _____

Signature
(Approval for Manufacturing) _____ Date _____

All dimensions are subject to manufactures tolerance of plus or minus 1/8" nominal and subject to change without notice. Murdock assumes no responsibility for use of void or superseded data. Dimensions may change with the addition of optional accessories. Murdock Mfg.™, Member of Morris Group International™. Please visit www.murdockmfg.com for most current specifications.